

Option

- Customized colors
- Compatible with several different styles of feet
- PVC-free column
- Bracket for crossbar

Usage


- Single column lift or two columns, three columns, four columns synchronous lift; Can be used with our TO(single column), TS(double columns), TT(three columns), TF(four columns) standard frames
- Compatible with Jiecang control box: JCB35N1; JCB35N2; JCB35N3; JCB35N4
- Duty cycle: 10 %, Max. 2 minutes operation/Min. 18minutes rest of continuous use at full load
- Working environment: Indoor
- Storage and transport temperature: -10°C ~ 70°C
- Approved according to EN60335-1 and UL 962

Technical specifications

Type	Rated load (N)	Self locking (N)	Typical current at rated Load (A)	Typical speed 0 load~ Rated load (mm/s)	Duty cycle	Stroke length (mm)	Built-in length (mm)
JS36DR1-2-S	800	1200	5	32	10%	500	650

Note: The measurements above are made in connection with the control box JCB35N series.

Dimensions

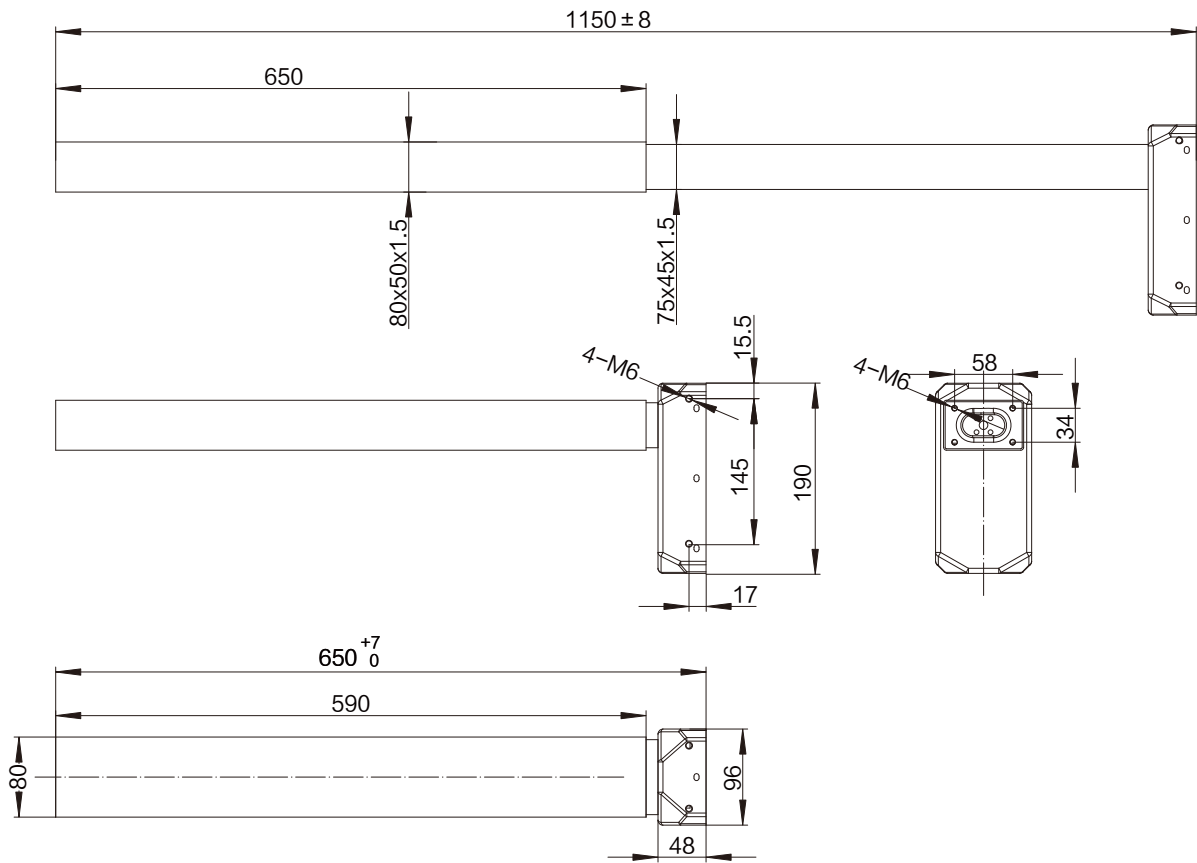

Ordering Key

JS36D R1 - 2 - S - 500/650 - 0 - H		
	Color	B=Black H=White G=Gray
	Pre-weld bracket size & location	
	Installation length	650
	Stroke length	500
	Stand or upside down	S=Standard R=Reverse
	Segment	2=Two-segment 3=Three-segment
	Tube size	R1=80x50 75x45
	JS36Dseries lifting column type	