

---

# Line lifting column

## JS36ZS8-3-S



Data sheet

## JS36ZS8-3-S

- JS36ZS8-3-S is a compact 3-part inline column that provides more diverse design for the overall lifting system.
- Without a motor housing design, it has a simple appearance, compact structure and a wide range of applications.
- It has a static self-locking force of 1500N, ensuring the strong static load capacity of the complete set of standing desk.
- Excellent comprehensive performance, low noise, high load, high stability.
- Suitable for office, home and business environment.



---

### Features

- Non-porous design of tube
- Full thrust: 800N
- Full load & non load capacity keep the stable speed: 40mm/s
- Low noise level:  $\leq 50$ dB
- The bending moment: 100N.m
- Standard installation length: 560mm
- Standard stroke length: 650mm
- Size of outer tube: 70x70mm
- Motor: high-power motor by JIECANG
- Hall sensor enabling parallel drive
- Surface: powder coating; Standard colors: white, black, grey

---

## Usages

- Single column lift or two columns, three columns, four columns synchronous lift;  
Can be used with our TA/TO (single column), TS (double columns), TT (three columns),  
TF (four columns) standard frames
- Compatible with control box: JCB36N1; JCB36N2; JCB36N3; JCB36N4; JCB35NS1; JCB35NS2;  
JCB36M; JCB36M1; JCB36MH3
- Duty cycle: 10 %, Max. 2 minutes operation/Min. 18minutes rest of continuous use at full load
- Working environment: Indoor
- Storage and transport temperature: -10°C ~ 70°C


---

## Technical specifications

Model	Load (N)	Self-lock (N)	Rated load current (A)	Maximum speed no load ~ rated load (mm/s)	Duty cycle	Stroke (mm)	Min. height (mm)
JS36ZS8-3-S	800	1500	5	40	10%	650	560

---

## Dimensions

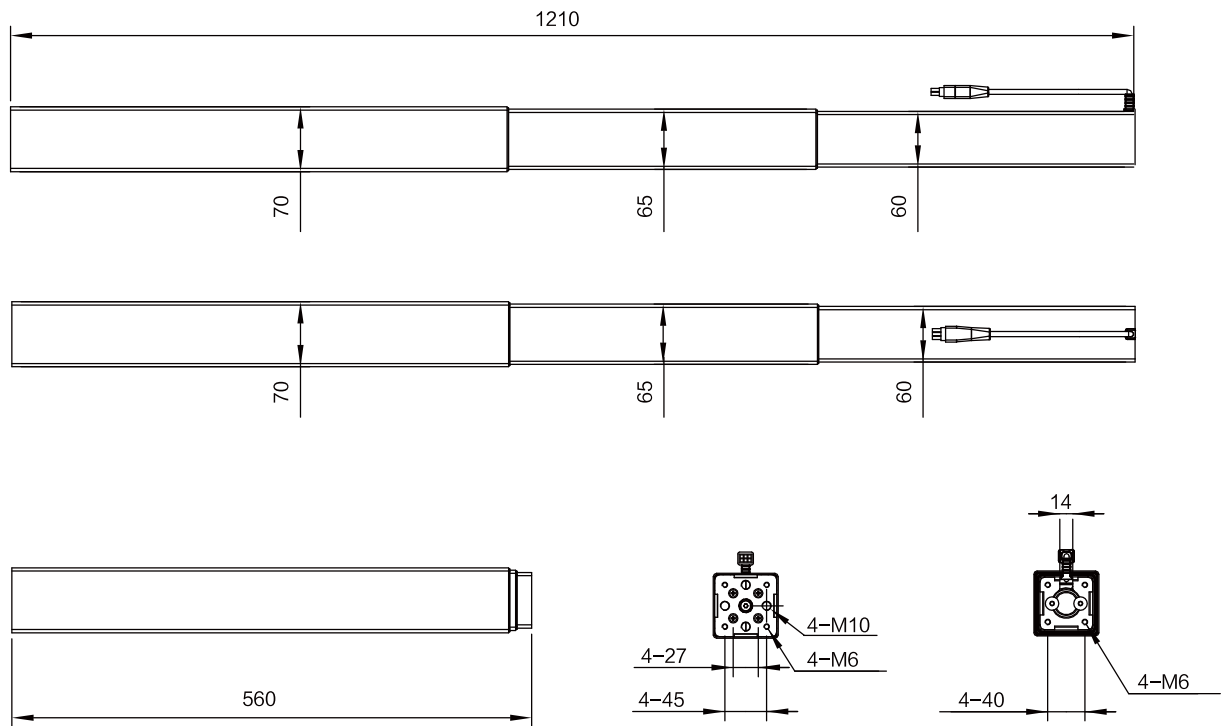

## Ordering Key

